

# Product data sheet

Specifications



## Variable speed drive, Altivar Process ATV600, ATV630, 90kW/125 hp, 380...480 V, IP21/UL type 1

ATV630D90N4

This includes daily engineering support to process operations such as, water and waste water treatment, instrument and utility air systems, fire water system, cooling towers, chemical management, and barge, rail and truck loading operations.

**Product availability : Stock - Normally stocked in distribution facility**

**Price\* : 11,996.40 USD**

### Main

Range of Product	Altivar Process ATV600	
Product or Component Type	Variable speed drive	
Product Specific Application	Process and utilities	ولی اینو نفهمید معادلش چی باید باشه، معنیشو اون بالا گذاشتم
Device short name	ATV630	شاید بشه گفت مصارف معمولی
Variant	Standard version	بذار
Product destination	Asynchronous motors Synchronous motors	
EMC filter	Integrated 492.13 ft (150 m) EN/IEC 61800-3 category C3	
IP degree of protection	IP21IEC 61800-5-1 IP21IEC 60529	
[Us] rated supply voltage	380...480 V	
Degree of protection	UL type 1 UL 508C	
Type of cooling	Forced convection	
Supply frequency	50...60 380...480 V -	
Motor power kW	90 kW normal duty) 75 kW heavy duty)	
Maximum Horse Power Rating	125 hp normal duty 100 hp heavy duty	نمیخواه چون کیلوواتش هست
Line current	156.2 A 380 V normal duty) 135.8 A 480 V normal duty) 134.3 A 380 V heavy duty) 118.1 A 480 V heavy duty)	
Prospective line Isc	50 kA	
Apparent power	112.9 kVA 480 V normal duty) 98.2 kVA 480 V heavy duty)	
Continuous output current	173 A 2.5 kHz normal duty 145 A 2.5 kHz heavy duty	
Asynchronous motor control profile	Constant torque standard Variable torque standard Optimized torque mode	
Synchronous motor control profile	Permanent magnet motor Synchronous reluctance motor	اینم نمیخواه

\* Price is "List Price" and may be subject to a trade discount – check with your local distributor or retailer for actual price.

X	Speed drive output frequency	0.1...500 Hz	
X	Nominal switching frequency	2.5 kHz	
X	Switching frequency	2.5...8 kHz with derating factor 2...8 kHz adjustable	
	<del>Safety function</del>	STO (safe torque off) SIL 3	نمیخواهد
	<del>Discrete input logic</del>	16 preset speeds	
X	Communication port protocol	Ethernet Modbus serial Modbus TCP	
X	Option card	Slot A communication module, Profibus DP V1 Slot A communication module, PROFINET Slot A communication module, DeviceNet Slot A communication module, Modbus TCP/EtherNet/IP Slot A communication module, CANopen daisy chain RJ45 Slot A communication module, CANopen SUB-D 9 Slot A communication module, CANopen screw terminals Slot A/slot B digital and analog I/O extension module Slot A/slot B output relay extension module Slot A communication module, Ethernet IP/Modbus TCP/MD-Link communication module, BACnet MS/TP communication module, Ethernet Powerlink	

## Complementary

	<del>Mounting Mode</del>	Wall mount	حالت نصب به نظر برا هیچ کدام ندارد، خودتون میفهمند چجوری نصبش کنند
	<del>Maximum transient current</del>	190.3 A 60 s normal duty) 217.5 A 60 s heavy duty)	
X	Phase	3 phase	
X	Discrete output number	0	
X	Discrete output type	Relay outputs R1A, R1B, R1C 250 V AC 3000 mA Relay outputs R1A, R1B, R1C 30 V DC 3000 mA Relay outputs R2A, R2C 250 V AC 5000 mA Relay outputs R2A, R2C 30 V DC 5000 mA Relay outputs R3A, R3C 250 V AC 5000 mA Relay outputs R3A, R3C 30 V DC 5000 mA	اینو بذار، نوع خروجی گسسته و همشو کپی بپیست کن
X	Output voltage	<= power supply voltage	
	<del>Permissible temporary current boost</del>	1.1 x In 60 s normal duty) 1.5 x In 60 s heavy duty)	نمیخواهد
	<del>Motor slip compensation</del>	Adjustable Not available in permanent magnet motor law Automatic whatever the load Can be suppressed	
X	Acceleration and deceleration ramps	Linear adjustable separately from 0.01...9999 s	
X	Physical interface	Ethernet 2-wire RS 485	
	<del>Braking to standstill</del>	By DC injection	
	<b>Protection type</b>	Thermal protection motor Safe torque off motor Motor phase break motor Thermal protection drive Safe torque off drive Overheating drive Overcurrent between output phases and earth drive Overload of output voltage drive Short-circuit protection drive Motor phase break drive Overvoltages on the DC bus drive Line supply overvoltage drive Line supply undervoltage drive Line supply phase loss drive Overspeed drive Break on the control circuit drive	
X	Transmission Rate	10, 100 Mbits 4800 bps, 9600 bps, 19200 bps, 38.4 Kbps	
	<del>Frequency resolution</del>	Display unit 0.1 Hz Analog input 0.012/50 Hz	

Transmission frame	RTU
Electrical connection	Control removable screw terminals 0.5...1.5 mm <sup>2</sup> AWG 20...AWG 16 Line side screw terminal 120 mm <sup>2</sup> AWG 4/0...250 kcmil Motor screw terminal 120 mm <sup>2</sup> 250 kcmil
Connector type	RJ45 on the remote graphic terminal)Ethernet/Modbus TCP RJ45 on the remote graphic terminal)Modbus serial
Data format	8 bits, configurable odd, even or no parity
Type of polarization	No impedance
Exchange mode	Half duplex, full duplex, autonegotiation Ethernet/Modbus TCP
Number of addresses	1...247 Modbus serial
Method of access	Slave Modbus TCP
Supply	External supply for digital inputs 24 V DC 19...30 V), <1.25 mA overload and short-circuit protection Internal supply for reference potentiometer (1 to 10 kOhm) 10.5 V DC +/- 5 %, <10 mA overload and short-circuit protection Internal supply for digital inputs and STO 24 V DC 21...27 V), <200 mA overload and short-circuit protection
Local signalling	for local diagnostic 3 LEDs for embedded communication status 3 LEDs (dual colour) for communication module status 4 LEDs (dual colour) for presence of voltage 1 LED (red)
Width	11.42 in (290 mm)
Height	36.30 in (922 mm)
Depth	12.72 in (323 mm)
Net Weight	128.97 lb(US) (58.5 kg)
Analogue input number	3
Analogue input type	AI1, AI2, AI3 software-configurable voltage 0...10 V DC 31.5 kOhm 12 bits AI1, AI2, AI3 software-configurable current 0...20 mA 250 Ohm 12 bits AI2 voltage analog input - 10...10 V DC 31.5 kOhm 12 bits
Discrete input number	8
Discrete input type	DI7, DI8 programmable as pulse input 0...30 kHz, 24 V DC <= 30 V)
Input compatibility	DI1...DI6 discrete input level 1 PLC EN/IEC 61131-2 DI5, DI6 discrete input level 1 PLC IEC 65A-68 STOA, STOB discrete input level 1 PLC EN/IEC 61131-2  Positive logic (source) DI1...DI8), < 5 V, > 11 V Negative logic (sink) DI1...DI8), > 16 V, < 10 V
Analogue output number	2
Analogue output type	Software-configurable voltage AQ1, AQ2 0...10 V DC 470 Ohm 10 bits Software-configurable current AQ1, AQ2 0...20 mA 10 bits Software-configurable current DQ-, DQ+ 30 V DC Software-configurable current DQ-, DQ+ 100 mA
Sampling duration	2 ms +/- 0.5 ms DI1...DI4) - discrete input 5 ms +/- 1 ms DI5, DI6) - discrete input 5 ms +/- 0.1 ms AI1, AI2, AI3) - analog input 10 ms +/- 1 ms AO1) - analog output
Accuracy	+/- 0.6 % AI1, AI2, AI3 for a temperature variation 60 °C analog input +/- 1 % AO1, AO2 for a temperature variation 60 °C analog output
Linearity error	AI1, AI2, AI3 +/- 0.15 % of maximum value analog input AO1, AO2 +/- 0.2 % analog output
Relay output number	3
Relay output type	Configurable relay logic R1 fault relay NO/NC 100000 cycles Configurable relay logic R2 sequence relay NO 100000 cycles Configurable relay logic R3 sequence relay NO 100000 cycles
Refresh time	Relay output R1, R2, R3)5 ms +/- 0.5 ms)
Minimum switching current	Relay output R1, R2, R3 5 mA 24 V DC
Maximum switching current	Relay output R1, R2, R3 resistive, cos phi = 1 3 A 250 V AC Relay output R1, R2, R3 resistive, cos phi = 1 3 A 30 V DC Relay output R1, R2, R3 inductive, cos phi = 0.4 7 ms 2 A 250 V AC Relay output R1, R2, R3 inductive, cos phi = 0.4 7 ms 2 A 30 V DC

میشه بیت توارن parity اینو بذار برا مدباس

نمیخواه

نمیخواه

<u>Isolation</u>	Between power and control terminals	
<del>X</del> <b>Maximum output frequency</b>	500 kHz	بذار
<del>X</del> <b>Maximum Input Current per Phase</b>	156.2 A	بذار
<u>Variable speed drive application selection</u>	Building - HVAC compressor centrifugal Food and beverage processing other application Mining mineral and metal fan Mining mineral and metal pump Oil and gas fan Water and waste water other application Building - HVAC screw compressor Food and beverage processing pump Food and beverage processing fan Food and beverage processing atomization Oil and gas electro submersible pump (ESP) Oil and gas water injection pump Oil and gas jet fuel pump Oil and gas compressor for refinery Water and waste water centrifuge pump Water and waste water positive displacement pump Water and waste water electro submersible pump (ESP) Water and waste water screw pump Water and waste water lobe compressor Water and waste water screw compressor Water and waste water compressor centrifugal Water and waste water fan Water and waste water conveyor Water and waste water mixer	ببین آگه توی توضیحاتش هست که برا آب و فاضلاب و ایناس اینا نمیخواد، اون گزینه بالا که گفتم معنیشو نمیدونم دقیقاً مربوط به همین میشه
<del>X</del> <b>Motor power range AC-3</b>	55...100 kW 380...440 V 3 phase 55...100 kW 480...500 V 3 phase	بذار
<u>Quantity per Set</u>	1	نمیخواد
<u>Enclosure mounting</u>	Wall mounted	نمیخواد
<b>Environment</b>		
<u>Insulation resistance</u>	> 1 MOhm 500 V DC for 1 minute to earth	
<u>Noise level</u>	62.4 dB 86/188/EEC	
<del>X</del> <u>Power dissipation in W</u>	Natural convection 196 W 380 V 2.5 kHz Forced convection 1585 W 380 V 2.5 kHz	
<u>Volume of cooling air</u>	77932.15 Gal/hr(US) (295 m3/h)	نمیخواد
<del>X</del> <u>Operating position</u>	Vertical +/- 10 degree	
<u>Maximum THDI</u>	<48 % from 80...100 % of load IEC 61000-3-12	نمیخواد
<u>Electromagnetic compatibility</u>	Electrostatic discharge immunity test level 3 IEC 61000-4-2 Radiated radio-frequency electromagnetic field immunity test level 3 IEC 61000-4-3 Electrical fast transient/burst immunity test level 4 IEC 61000-4-4 1.2/50 µs - 8/20 µs surge immunity test level 3 IEC 61000-4-5 Conducted radio-frequency immunity test level 3 IEC 61000-4-6	
<u>Pollution degree</u>	2 EN/IEC 61800-5-1	
<u>Vibration resistance</u>	1.5 mm peak to peak 2...13 Hz)IEC 60068-2-6 1 gn 13...200 Hz)IEC 60068-2-6	
<u>Shock resistance</u>	15 gn 11 ms IEC 60068-2-27	
<u>Relative humidity</u>	5...95 % without condensation IEC 60068-2-3	
<del>X</del> <u>Ambient air temperature for operation</u>	5...122 °F (-15...50 °C) without derating) 122...140 °F (50...60 °C) with derating factor)	
<u>Ambient Air Temperature for Storage</u>	-40...158 °F (-40...70 °C)	
<del>X</del> <u>Operating altitude</u>	<= 3280.84 ft (1000 m) without derating 1000...4800 m with current derating 1 % per 100 m	
<u>Product Certifications</u>	ATEX INERIS TÜV DNV-GL UL ATEX zone 2/22 CSA	<input type="checkbox"/> <input type="checkbox"/>
<u>Marking</u>	CE	<input type="checkbox"/>

<b>Standards</b>	UL 508C EN/IEC 61800-3 EN/IEC 61800-3 environment 1 category C2 EN/IEC 61800-3 environment 2 category C3 EN/IEC 61800-5-1 IEC 61000-3-12 IEC 60721-3 IEC 61508 IEC 13849-1
------------------	--

<b>Overvoltage category</b>	III
-----------------------------	-----

<b>Regulation loop</b>	Adjustable PID regulator  62.4 dB  2
------------------------	--

## Ordering and shipping details

<b>Category</b>	22207-ATV630 FRAMES 5 & 6
-----------------	---------------------------

<b>Discount Schedule</b>	CP4E
--------------------------	------

<b>GTIN</b>	3606480701467
-------------	---------------

<b>Returnability</b>	Yes
----------------------	-----

<b>Country of origin</b>	IN
--------------------------	----

## Packing Units

<b>Unit Type of Package 1</b>	PCE
-------------------------------	-----

<b>Number of Units in Package 1</b>	1
-------------------------------------	---

<b>Package 1 Height</b>	23.23 in (59.0 cm)
-------------------------	--------------------

<b>Package 1 Width</b>	16.93 in (43.0 cm)
------------------------	--------------------

<b>Package 1 Length</b>	43.70 in (111.0 cm)
-------------------------	---------------------

<b>Package 1 Weight</b>	157.41 lb(US) (71.4 kg)
-------------------------	-------------------------

## Offer Sustainability

<b>Sustainable offer status</b>	Green Premium product
---------------------------------	-----------------------

<b>California proposition 65</b>	WARNING: This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to <a href="http://www.P65Warnings.ca.gov">www.P65Warnings.ca.gov</a>
----------------------------------	---

<b>REACH Regulation</b>	<a href="#">REACH Declaration</a>
-------------------------	-----------------------------------

<b>EU RoHS Directive</b>	Pro-active compliance (Product out of EU RoHS legal scope) <a href="#">EU RoHS Declaration</a>
--------------------------	---

<b>Mercury free</b>	Yes
---------------------	-----

<b>China RoHS Regulation</b>	<a href="#">China RoHS declaration</a>
------------------------------	--

<b>RoHS exemption information</b>	<a href="#">Yes</a>
-----------------------------------	---------------------

<b>Environmental Disclosure</b>	<a href="#">Product Environmental Profile</a>
---------------------------------	---

<b>Circularity Profile</b>	<a href="#">End of Life Information</a>
----------------------------	---


<b>WEEE</b>	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins.
-------------	--

<b>Upgradeability</b>	Upgraded components available
-----------------------	-------------------------------

**Dimensions**


**Drives with IP21 Top Cover**

Front and Left Views

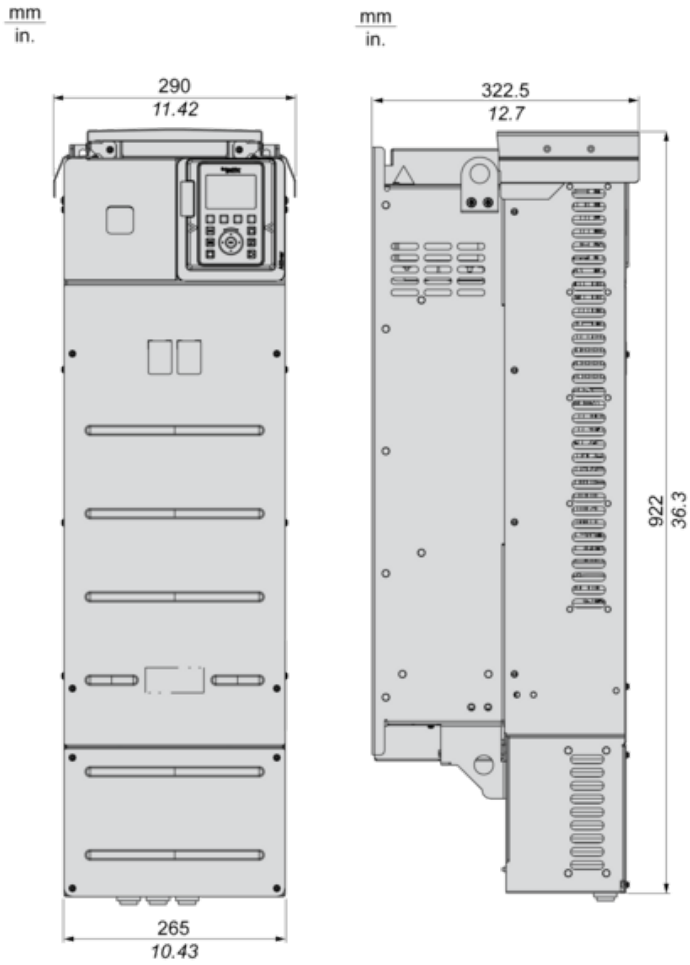

**Drives Without IP21 Top Cover**

Left and Rear Views

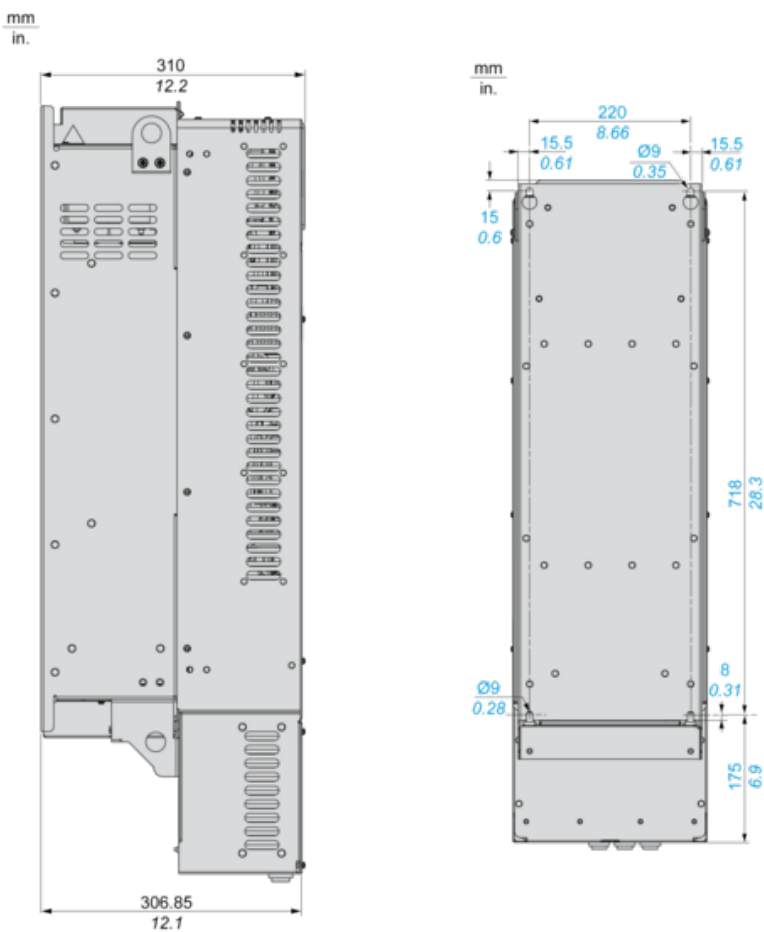

**Clearances**



X1	X2	X3
≥ 100 mm (3.94 in.)	≥ 100 mm (3.94 in.)	≥ 10 mm (0.39 in.)

**Mounting Types**


---

**Mounting Type A: Individual IP21**




$a \geq 110 \text{ mm (4.33 in.)}$

**Mounting Type B: Side by Side IP20 (Possible, 2 Drives Only)**

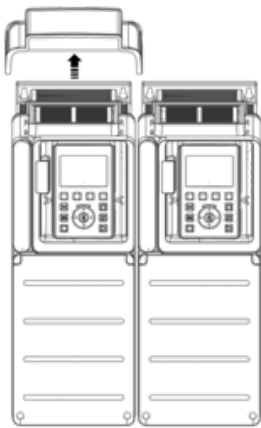

**Mounting Type C: Individual IP20**

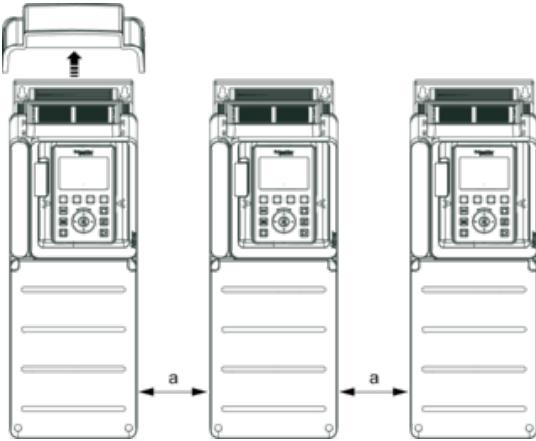

$a \geq 110 \text{ mm (4.33 in.)}$



**Three-Phase Power Supply with Upstream Breaking via Line Contactor**

Connection diagrams conforming to standards EN 954-1 category 1 and IEC/EN 61508 capacity SIL1, stopping category 0 in accordance with standard IEC/EN 60204-1



(1) Line choke if used

(2) Use relay R1 set to operating state Fault to switch Off the product once an error is detected.

**A1** : Drive

**KM1** : Line Contactor


**Q2, Q3** : Circuit breakers

**S1, S2** : Pushbuttons

**T1** : Transformer for control part

## Three-Phase Power Supply with Downstream Breaking via Contactor

Connection diagrams conforming to standards EN 954-1 category 1 and IEC/EN 61508 capacity SIL1, stopping category 0 in accordance with standard IEC/EN 60204-1

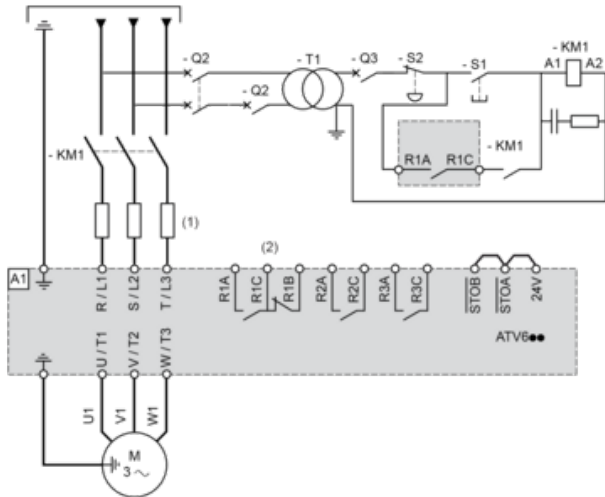

(1) Line choke if used

(2) Use relay R1 set to operating state Fault to switch Off the product once an error is detected.

A1 : Drive

KM1 : Contactor

Control Block Wiring Diagram



- (1) Safe Torque Off
  - (2) Analog Output
  - (3) Digital Input
  - (4) Reference potentiometer
  - (5) Analog Input
- R1A, R1B, R1C** : Fault relay  
**R2A, R2C** : Sequence relay  
**R3A, R3C** : Sequence relay

Sensor Connection

It is possible to connect either 1 or 3 sensors on terminals AI2 or AI3.



**Sink / Source Switch Configuration**

The switch is used to adapt the operation of the logic inputs to the technology of the programmable controller outputs.

- Set the switch to Source (factory setting) if using PLC outputs with PNP transistors.
- Set the switch to Ext if using PLC outputs with NPN transistors.

**Switch Set to SRC (Source) Position Using the Output Power Supply for the Digital Inputs**



**Switch Set to SRC (Source) Position and Use of an External Power Supply for the DIs**




**Switch Set to SK (Sink) Position Using the Output Power Supply for the Digital Inputs**



**Switch Set to EXT Position Using an External Power Supply for the DIs**



Derating Curves

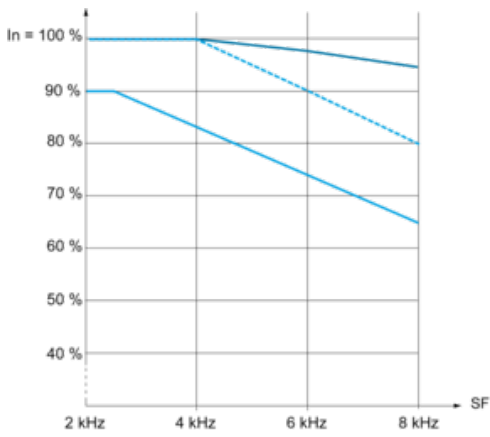

- 40 °C (104 °F) - Mounting type A, B and C
- - - 50 °C (122 °F) - Mounting type A, B and C
- 60 °C (140 °F) - Mounting type B and C

In : Nominal Drive Current

SF : Switching Frequency

Recommended replacement(s)